

1 范围

本标准规定了公司产品吊装用一般焊接式吊耳和吊钩形式与尺寸及许用载荷。
 本标准适用于公司产品可焊接零部件的吊装。

2 吊耳的结构形式与尺寸

2.1 系列 1

- 2.1.1 形式：吊耳厚度 $t < 60\text{mm}$ 时见图 1； $t \geq 60\text{mm}$ 时见图 2。
 2.1.2 尺寸：材料为 Q235 见表 1；材料为 Q345 见表 2；材料为 1Cr18Ni9 见表 3。

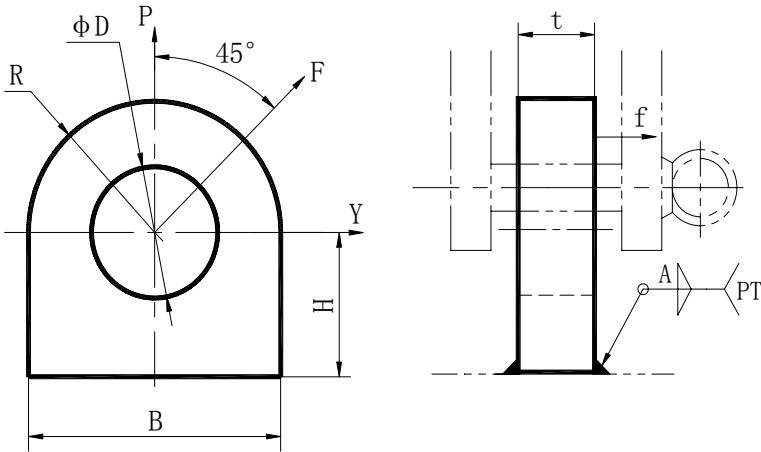


图 1

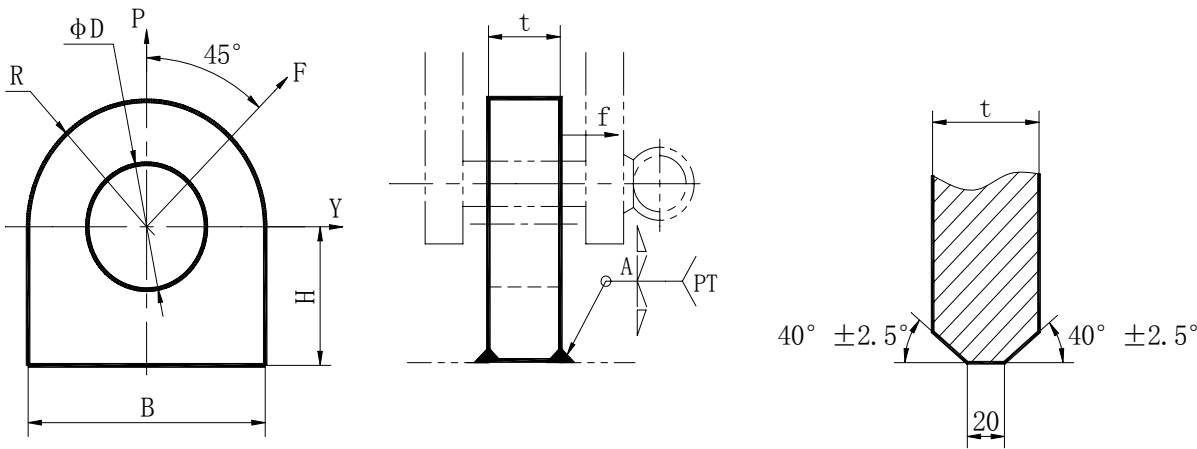


图 2

mm

代 号	B	D	H	R	t	焊角 A	重量 (kg)	许用载荷			
								P 向	F 向	Y 向	f 向
								(t)			
8EA.885.031	100	50	45	50	16	10	0.81	3.8	3.8	3.4	1.7
8EA.885.032					20	12	1.01	4.5	4.4	4.0	2.4
8EA.885.033					30	14	1.51	6.8	5.1	4.6	3.9
8EA.885.034					40	15	2.02	9.1	5.3	5.0	5.4
8EA.885.035					50	16	2.52	9.8	5.6	5.1	6.6
8EA.885.036	150	75	70	75	30	14	3.49	10.3	7.6	6.8	3.8
8EA.885.037					40	15	4.65	13.7	8.1	7.3	5.2
8EA.885.038					50	16	5.82	14.7	8.3	7.4	6.4
8EA.885.042					60	18	7.00	19.7	18.0	8.0	8.0
8EA.885.043					80	20	9.31	25.1	20.0	8.8	14.3
8EA.885.044					100	22	11.64	31.3	22.0	9.7	22.4
8EA.885.039	200	95	90	100	40	15	8.31	17.5	10.6	9.5	5.1
8EA.885.040					50	16	10.38	19.6	11.3	10.2	6.6
8EA.885.045					60	18	12.46	26.3	24.0	10.9	8.3
8EA.885.046					80	20	16.61	33.4	26.7	12.1	14.8
8EA.885.047					100	22	20.76	41.8	29.4	13.3	23.2
8EA.885.041	300	145	140	150	50	16	23.72	32.2	16.6	14.9	6.4
8EA.885.048					60	18	28.47	39.5	36.0	16.0	8.0
8EA.885.049					80	20	37.96	50.2	40.1	17.7	14.3
8EA.885.050					100	22	47.45	62.8	44.1	19.5	22.4
8EA.885.051					120	25	56.94	71.6	47.6	21.1	30.6

表 2 (Q345)

mm

代 号	B	D	H	R	t	焊角 A	重量 (kg)	许用载荷			
								P 向	F 向	Y 向	f 向
								(t)			
8EA.885.052	100	50	45	50	16	10	0.81	5.6	5.6	5.1	2.5
8EA.885.053					20	12	1.01	6.6	6.6	5.7	3.5
8EA.885.054					30	14	1.51	9.9	7.5	6.7	5.7
8EA.885.055					40	15	2.02	12.0	7.2	6.5	7.0
8EA.885.056					50	16	2.52	13.4	7.7	7.0	9.1
8EA.885.057	150	75	70	75	30	14	3.49	14.9	11.0	9.8	5.5
8EA.885.058					40	15	4.65	18.9	10.7	9.5	6.8
8EA.885.059					50	16	5.82	20.2	11.4	10.2	8.8
8EA.885.063					60	18	7.00	25.2	24.2	10.7	10.8
8EA.885.064					80	20	9.31	33.6	26.9	11.9	19.2
8EA.885.065					100	22	11.64	42.0	29.6	13.1	30.0
8EA.885.060	200	95	90	100	40	15	8.31	24.0	14.5	13.1	7.0
8EA.885.061					50	16	10.38	26.9	15.5	14.0	9.1
8EA.885.066					60	18	12.46	33.6	32.2	14.6	11.2
8EA.885.067					80	20	16.61	44.9	35.8	16.3	19.9
8EA.885.068					100	22	20.76	56.1	39.4	17.9	31.1
8EA.885.062	300	145	140	150	50	16	23.72	40.4	22.8	20.4	8.8
8EA.885.069					60	18	28.47	50.0	48.4	21.4	10.8
8EA.885.070					80	20	37.96	67.4	53.8	23.8	19.2
8EA.885.071					100	22	47.45	84.2	59.2	26.2	30.0
8EA.885.072					120	25	56.94	101.1	67.2	29.8	43.2

8EA.885.01H—2007													
共 16 页		第 4 页											
表 3(1Cr18Ni9)mm													
代 号	B	D	H	R	t	焊角 A	重量 (kg)	许用载荷					
								P 向	F 向	Y 向	f 向		
								(t)					
8EA.885.073	100	50	45	50	16	10	0.81	3.34	3.34	3.04	1.49		
8EA.885.074					20	12	1.01	4.18	4.05	3.65	2.21		
8EA.885.075					30	14	1.51	6.27	4.73	4.26	3.62		
8EA.885.076					40	15	2.02	8.36	5.06	4.56	4.92		
8EA.885.077					50	16	2.52	9.37	5.40	4.86	6.37		
8EA.885.078	150	75	70	75	30	14	3.49	9.14	6.94	6.22	3.49		
8EA.885.079					40	15	4.65	12.55	7.43	6.67	4.75		
8EA.885.080					50	16	5.82	14.05	7.93	7.11	6.14		
8EA.885.084					60	18	7.00	18.82	18.04	8.00	8.06		
8EA.885.085					80	20	9.31	25.10	20.06	8.89	14.34		
8EA.885.086					100	22	11.64	31.37	22.07	9.78	22.41		
8EA.885.081	200	95	90	100	40	15	8.31	16.74	10.13	9.12	4.92		
8EA.885.082					50	16	10.38	18.74	10.81	9.73	6.37		
8EA.885.087					60	18	12.46	25.11	24.06	10.95	8.36		
8EA.885.088					80	20	16.61	33.48	26.75	12.17	14.87		
8EA.885.089					100	22	20.76	41.85	29.43	13.38	23.24		
8EA.885.083	300	145	140	150	50	16	23.72	28.11	15.86	14.23	6.14		
8EA.885.090					60	18	28.47	37.68	36.09	16.01	8.06		
8EA.885.091					80	20	37.96	50.24	40.12	17.78	14.34		
8EA.885.092					100	22	47.45	62.81	44.14	19.56	22.41		
8EA.885.093					120	25	56.94	75.37	50.14	22.23	32.27		

2.2 系列 2

2.2.1 形式：吊耳厚度 $t<60\text{mm}$ 时见图 3； $t\geq60\text{mm}$ 时见图 4。

2.2.2 尺寸：材料为 Q235 见表 4；材料为 Q345 见表 5；材料为 1Cr18Ni9 见表 6。

IX.1—29	版次		日期	年 月 日	
---------	----	--	----	-------	--

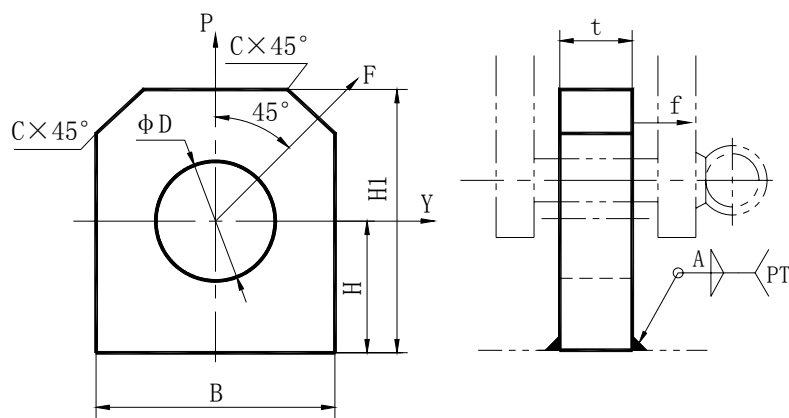


图 3

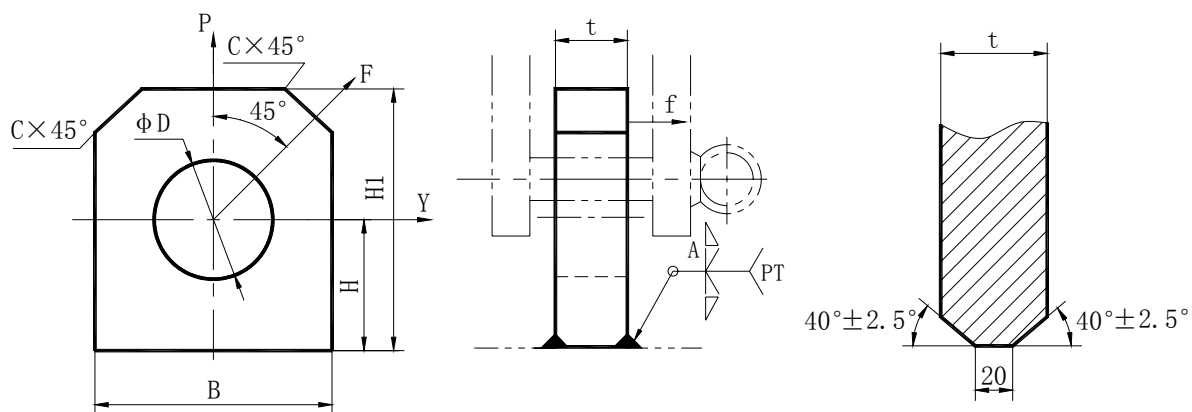


图 4

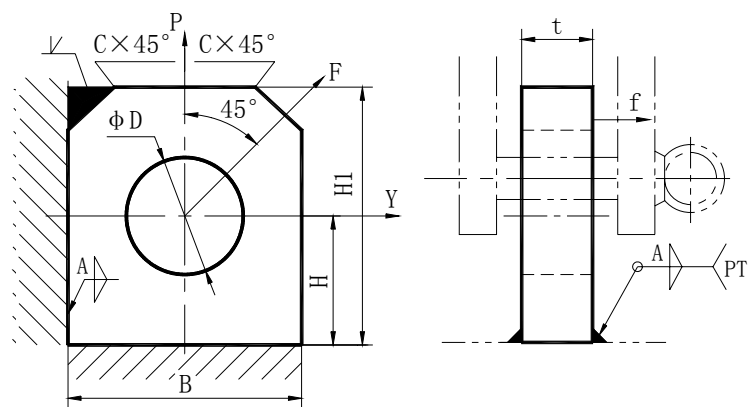


图 5

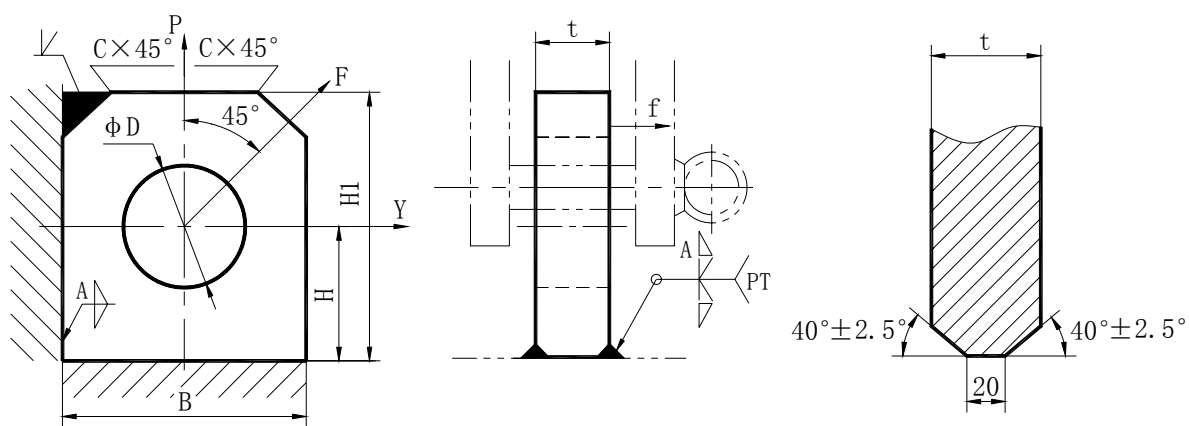


图 6

表 4(Q235)

mm

代 号	B	D	H	H1	C	t	焊角 A	重量 (kg)	许用载荷			
									P 向	F 向	Y 向	f 向
									(t)			
8EA.885.094	60	25	20	50	5	16	10	0.4	2.2	2.2	2.2	2.3
8EA.885.095						20	12	0.5	2.6	2.8	2.8	3.2
8EA.885.096						30	14	0.8	4.0	3.6	3.4	5.3
8EA.885.097						40	15	1.1	5.1	3.7	3.6	7.3
8EA.885.098						50	16	1.3	5.8	4.0	3.7	9.0
8EA.885.099	100	50	45	95	15	16	10	0.9	3.8	3.8	3.4	1.7
8EA.885.100						20	12	1.1	4.5	4.4	4.0	2.4
8EA.885.101						30	14	1.7	6.8	5.1	4.6	3.9
8EA.885.102						40	15	2.3	8.7	5.5	5.0	5.4
8EA.885.103						50	16	2.9	9.8	5.6	5.1	6.6
8EA.885.104	150	75	70	145	20	30	14	4.0	10.3	7.6	6.8	3.8
8EA.885.105						40	15	5.3	13.7	8.1	7.3	5.2
8EA.885.106						50	16	6.6	14.7	8.3	7.4	6.4
8EA.885.109						60	18	7.9	19.7	18.9	8.3	8.4
8EA.885.110						80	20	10.6	25.1	20.0	8.8	14.3
8EA.885.111						100	22	12.3	31.3	22.0	9.7	22.4
8EA.885.107	200	95	90	190	30	40	15	9.4	18.3	10.7	10.0	5.4
8EA.885.108						50	16	11.7	19.6	10.9	10.2	6.6
8EA.885.112						60	18	14.1	26.3	25.2	11.4	8.7
8EA.885.113						80	20	18.8	33.4	26.7	12.1	14.8
8EA.885.114						100	22	23.5	41.8	29.4	13.3	23.2

表 5 (Q345)

mm

代 号	B	D	H	H1	C	t	焊角 A	重量 (kg)	许用载荷			
									P 向	F 向	Y 向	f 向
									(t)			
8EA.885.115	60	25	20	50	5	16	10	0.4	3.3	3.3	3.3	3.4
8EA.885.116						20	12	0.5	3.8	3.8	3.8	4.7
8EA.885.117						30	14	0.8	5.8	5.3	4.9	7.7
8EA.885.118						40	15	1.1	7.0	5.1	4.7	9.5
8EA.885.119						50	16	1.3	8.0	5.5	5.0	12.3
8EA.885.120	100	50	45	95	15	16	10	0.9	9.8	5.6	5.1	2.5
8EA.885.121						20	12	1.1	11.1	6.4	5.7	3.5
8EA.885.122						30	14	1.7	13.0	7.5	6.7	5.7
8EA.885.123						40	15	2.3	12.6	7.2	6.5	7.0
8EA.885.124						50	16	2.9	13.4	7.7	7.0	9.1
8EA.885.125	150	75	70	145	20	30	14	4.0	14.9	11.0	9.8	5.5
8EA.885.126						40	15	5.3	18.0	10.7	9.5	6.8
8EA.885.127						50	16	6.6	18.8	11.4	10.2	8.8
8EA.885.130						60	18	7.9	25.2	24.2	10.7	10.8
8EA.885.131						80	20	10.6	33.6	26.9	11.9	19.2
8EA.885.132						100	22	12.3	42.0	29.6	13.1	30.0
8EA.885.128	200	95	90	190	30	40	15	9.4	24.0	14.1	13.1	7.0
8EA.885.129						50	16	11.7	25.1	15.0	14.0	9.1
8EA.885.133						60	18	14.1	33.6	32.2	14.6	11.2
8EA.885.134						80	20	18.8	44.9	35.8	16.3	19.9
8EA.885.135						100	22	23.5	56.1	39.4	17.9	31.1

8EA.885.01H—2007													
共 16 页		第 8 页											
表 6 (1Cr18Ni9)mm													
代 号	B	D	H	H1	C	t	焊角 A	重量 (kg)	许用载荷				
									P 向	F 向	Y 向	f 向	
									(t)				
8EA.885.136	60	25	20	50	5	16	10	0.4	1.96	1.96	1.96	2.02	
8EA.885.137						20	12	0.5	2.45	2.45	2.45	2.99	
8EA.885.138						30	14	0.8	3.68	3.34	3.09	4.89	
8EA.885.139						40	15	1.1	4.90	3.58	3.32	6.65	
8EA.885.140						50	16	1.3	5.62	3.82	3.54	8.60	
8EA.885.141	100	50	45	95	15	16	10	0.9	3.34	3.34	3.04	1.49	
8EA.885.142						20	12	1.1	4.18	4.05	3.65	2.21	
8EA.885.143						30	14	1.7	6.27	4.73	4.26	3.62	
8EA.885.144						40	15	2.3	8.36	5.06	4.56	4.92	
8EA.885.145						50	16	2.9	9.37	5.40	4.86	6.37	
8EA.885.146	150	75	70	145	20	30	14	4.0	9.41	6.94	6.22	3.49	
8EA.885.147						40	15	5.3	12.55	7.43	6.67	4.75	
8EA.885.148						50	16	6.6	14.05	7.93	7.11	6.14	
8EA.885.151						60	18	7.9	18.82	18.04	8.00	8.06	
8EA.885.152						80	20	10.6	25.10	20.06	8.89	14.34	
8EA.885.153						100	22	12.3	31.37	22.07	9.78	22.41	
8EA.885.149	200	95	90	190	30	40	15	9.4	16.74	9.81	9.12	4.92	
8EA.885.150						50	16	11.7	18.74	10.46	9.73	6.37	
8EA.885.154						60	18	14.1	25.11	24.06	10.95	8.36	
8EA.885.155						80	20	18.8	33.48	26.75	12.17	14.87	
8EA.885.156						100	22	23.5	41.85	29.43	13.38	23.24	

2.3 系列 3

2.3.1 形式：吊耳厚度 $t<60\text{mm}$ 时见图 5； $t\geq 60\text{mm}$ 时见图 6。

2.3.2 尺寸：材料为 Q235 见表 7；材料为 Q345 见表 8。

IX.1—29	版次		日期	年 月 日	
---------	----	--	----	-------	--

表 7 (Q235)

mm

代 号	B	D	H	H1	C	t	焊角 A	重量 (kg)	许用载荷			
									P 向	F 向	Y 向	f 向
									(t)			
8EA.885.157	60	25	35	65	5	16	10	0.4	1.9	2.0	1.8	1.7
8EA.885.158						20	12	0.5	2.3	2.5	2.2	2.4
8EA.885.159						30	14	0.8	3.4	3.7	3.4	4.0
8EA.885.160						40	15	1.1	4.6	4.9	4.5	5.5
8EA.885.161						50	16	1.3	5.3	5.8	5.2	6.3
8EA.885.162	100	50	45	95	15	16	10	0.9	3.1	3.4	2.9	1.6
8EA.885.163						20	12	1.1	3.9	4.5	3.5	2.3
8EA.885.164						30	14	1.7	5.6	6.7	5.3	4.5
8EA.885.165						40	15	2.3	7.6	8.9	7.0	6.9
8EA.885.166						50	16	2.9	9.0	10.4	8.5	10.1
8EA.885.167	150	75	70	145	20	30	14	4.0	8.0	9.3	8.0	3.3
8EA.885.168						40	15	5.3	11.4	13.2	10.7	6.6
8EA.885.169						50	16	6.6	13.8	16.6	12.3	9.0
8EA.885.172						60	18	7.9	17.8	19.2	13.5	10.9
8EA.885.173						80	20	10.6	24.0	25.3	16.2	18.4
8EA.885.174						100	22	13.2	30.0	31.1	19.0	27.6
8EA.885.170	200	95	90	190	30	40	15	9.4	15.3	17.7	13.9	5.8
8EA.885.171						50	16	11.7	19.3	20.0	15.3	8.3
8EA.885.175						60	18	14.1	23.9	25.4	19.7	12.2
8EA.885.176						80	20	18.8	32.1	30.1	22.4	18.9
8EA.885.177						100	22	23.5	40.5	40.5	24.2	25.0

表 8 (Q345)									mm			
代 号	B	D	H	H1	C	t	焊角 A	重量 (kg)	许用载荷			
									P 向	F 向	Y 向	f 向
									(t)			
8EA.885.178	60	25	35	65	5	16	10	0.4	2.8	2.9	2.6	2.5
8EA.885.179						20	12	0.5	3.3	3.6	3.2	3.5
8EA.885.180						30	14	0.8	4.9	5.3	4.9	5.8
8EA.885.181						40	15	1.1	6.3	6.7	6.1	7.5
8EA.885.182						50	16	1.3	7.3	8.0	7.1	8.6
8EA.885.183	100	50	45	95	15	16	10	0.9	4.6	5.0	4.3	2.3
8EA.885.184						20	12	1.1	5.6	6.5	5.0	3.3
8EA.885.185						30	14	1.7	8.0	9.7	7.7	6.5
8EA.885.186						40	15	2.3	10.4	12.2	9.6	9.5
8EA.885.187						50	16	2.9	12.3	14.3	11.7	13.8
8EA.885.188	150	75	70	145	20	30	14	4.0	11.6	13.4	11.6	4.8
8EA.885.189						40	15	5.3	15.6	18.1	17.7	9.1
8EA.885.190						50	16	6.6	18.9	22.8	16.9	12.3
8EA.885.193						60	18	7.9	35.4	27.1	19.0	15.4
8EA.885.194						80	20	10.6	33.8	35.7	22.8	25.9
8EA.885.195						100	22	13.2	42.3	43.8	26.7	38.9
8EA.885.191	200	95	90	190	30	40	15	9.4	21.0	24.3	19.1	8.0
8EA.885.192						50	16	11.7	26.4	27.4	21.0	11.4
8EA.885.196						60	18	14.1	33.7	35.8	27.8	17.2
8EA.885.197						80	20	18.8	45.2	42.4	31.6	26.6
8EA.885.198						100	22	23.5	57.1	57.1	33.8	35.3

2.4 系列 4

2.4.1 形式：吊耳厚度 $t < 60\text{mm}$ 时见图 7； $t \geq 60\text{mm}$ 时见图 8。

2.4.2 尺寸：材料为 Q235 见表 9；材料为 Q345 见表 10；材料为 1Cr18Ni9 见表 11。

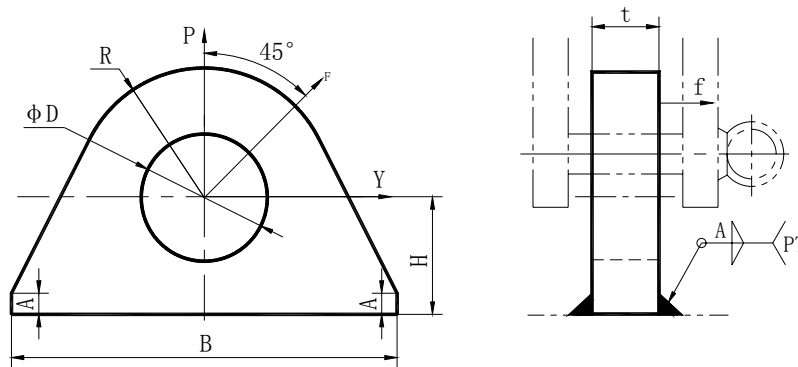


图 7

表 9(Q235)

mm

代 号	B	D	H	R	t	焊角 A	重量 (kg)	许用载荷			
								P 向	F 向	Y 向	f 向
								(t)			
8EA.885.199	150	50	45	50	16	10	1.01	3.8	3.8	3.8	2.5
8EA.885.200					20	12	1.27	4.5	4.5	4.5	3.6
8EA.885.201					30	14	1.93	6.8	6.8	6.8	5.9
8EA.885.202					40	15	2.58	9.1	9.1	9.1	8.1
8EA.885.203					50	16	3.24	10.9	10.5	10.9	10.0
8EA.885.204	250	75	70	75	30	14	4.80	10.3	10.3	10.3	6.3
8EA.885.205					40	15	6.40	13.7	13.7	13.7	8.6
8EA.885.206					50	16	8.01	16.4	16.4	16.4	10.7
8EA.885.209					60	18	9.61	19.7	19.7	19.7	14.1
8EA.885.210					80	20	12.90	25.1	25.1	25.1	23.9
8EA.885.211					100	22	16.23	31.3	31.3	31.3	37.3
8EA.885.207	350	95	90	100	40	15	11.57	18.3	18.3	18.3	9.4
8EA.885.208					50	16	14.50	21.9	21.9	21.9	11.6
8EA.885.212					60	18	17.49	26.3	26.3	26.3	15.3
8EA.885.213					80	20	23.45	33.4	33.4	33.4	26.0
8EA.885.214					100	22	29.48	41.8	41.8	41.8	40.6
8EA.885.215					120	25	35.67	47.7	47.7	47.7	55.7

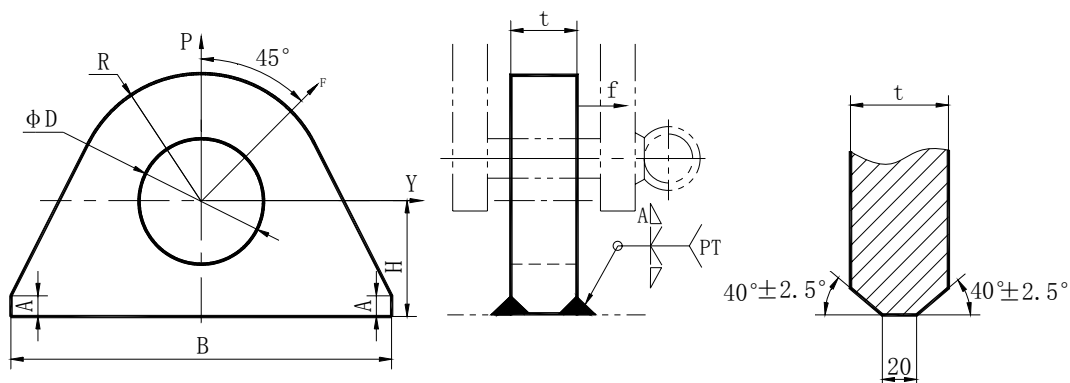


图 8

表 10(Q345)

mm

代 号	B	D	H	R	t	焊角 A	重量 (kg)	许用载荷			
								P 向	F 向	Y 向	f 向
								(t)			
8EA.885.216	150	50	45	50	16	10	1.01	5.6	5.6	5.6	3.7
8EA.885.217					20	12	1.27	6.6	6.6	6.6	5.2
8EA.885.218					30	14	1.93	9.9	9.9	9.9	8.6
8EA.885.219					40	15	2.58	12.0	12.0	12.0	10.6
8EA.885.220					50	16	3.24	15.0	14.4	13.4	13.7
8EA.885.221	250	75	70	75	30	14	4.80	14.9	14.9	14.9	9.2
8EA.885.222					40	15	6.40	18.0	18.0	18.0	11.4
8EA.885.223					50	16	8.01	22.5	22.5	22.5	14.7
8EA.885.226					60	18	9.61	25.2	25.2	24.4	18.0
8EA.885.227					80	20	12.90	33.6	33.6	27.1	32.0
8EA.885.228					100	22	16.23	42.0	42.0	29.8	50.1
8EA.885.224	350	95	90	100	40	15	11.57	24.0	24.0	24.0	12.4
8EA.885.225					50	16	14.50	30.1	30.1	30.1	16.0
8EA.885.229					60	18	17.49	33.6	33.6	33.6	19.6
8EA.885.230					80	20	23.45	44.9	44.9	39.5	34.9
8EA.885.231					100	22	29.48	56.1	56.1	43.4	54.5
8EA.885.232					120	25	35.67	67.3	67.3	49.3	78.5

表 11(1Cr18Ni9) mm

代 号	B	D	H	R	t	焊角 A	重量 (kg)	许用载荷			
								P 向	F 向	Y 向	f 向
								(t)			
8EA.885.233	150	50	45	50	16	10	1.01	3.34	3.34	3.34	2.24
8EA.885.234					20	12	1.27	4.18	4.18	4.18	3.32
8EA.885.235					30	14	1.93	6.27	6.27	6.27	5.43
8EA.885.236					40	15	2.58	8.36	8.36	8.36	7.39
8EA.885.237					50	16	3.24	10.45	10.06	9.37	9.55
8EA.885.238	250	75	70	75	30	14	4.80	9.41	9.41	9.41	5.82
8EA.885.239					40	15	6.40	12.55	12.55	12.55	7.92
8EA.885.240					50	16	8.01	15.68	15.68	15.68	10.24
8EA.885.243					60	18	9.61	18.82	18.82	18.20	13.44
8EA.885.244					80	20	12.90	25.10	25.10	20.22	23.90
8EA.885.245					100	22	16.23	31.37	31.37	22.25	37.35
8EA.885.241	350	95	90	100	40	15	11.57	16.74	16.74	16.47	8.62
8EA.885.242					50	16	14.50	20.92	20.92	20.92	11.15
8EA.885.246					60	18	17.49	25.11	25.11	25.11	14.64
8EA.885.247					80	20	23.45	33.48	33.48	29.45	26.03
8EA.885.248					100	22	29.48	41.85	41.85	32.40	40.67
8EA.885.249					120	25	35.67	50.22	50.22	36.82	58.57

3 吊钩的结构形式与尺寸

- 3.1 吊钩形式见图 9。
- 3.2 尺寸：材料为 Q235 见表 12；材料为 Q345 见表 13；材料为 1Cr18Ni9 见表 14。

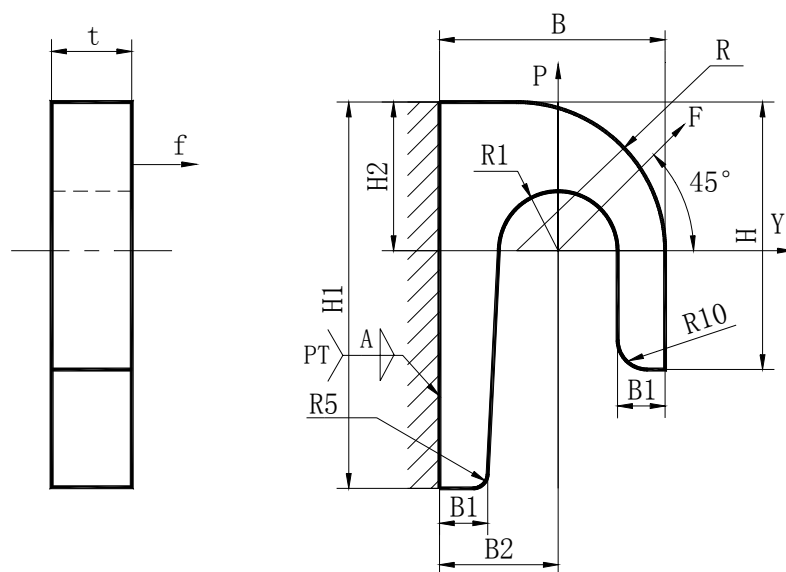


图 9

表 12(Q235)

mm

代 号	B	B1	B2	R	R1	H	H1	H2	t	焊角 A	重量 (kg)	许用载荷		
												P 向	F 向	Y 向
												(t)		
8EA.885.250	76	16	40	50	20	90	130	50	16	10	0.6	0.60	0.51	0.31
8EA.885.251									20	12	0.7	0.85	0.62	0.37
8EA.885.252									30	14	1.0	1.17	0.96	0.55
8EA.885.253									40	15	1.4	1.63	1.21	0.78
8EA.885.254	155	35	80	95	40	170	230	95	20	12	2.8	1.52	1.20	0.76
8EA.885.255									30	14	4.2	2.15	1.71	1.13
8EA.885.256									40	15	5.5	3.12	2.29	1.53
8EA.885.257									50	16	6.9	3.66	2.69	1.82
8EA.885.258									60	20	8.3	4.31	3.35	2.22

表 13(Q345)

mm

代 号	B	B1	B2	R	R1	H	H1	H2	t	焊角 A	重量 (kg)	许用载荷		
												P 向	F 向	Y 向
												(t)		
8EA.885.259	76	16	40	50	20	90	130	50	16	10	0.6	0.88	0.75	0.45
8EA.885.260									20	12	0.7	1.24	0.90	0.54
8EA.885.261									30	14	1.0	1.69	1.38	0.79
8EA.885.262									40	15	1.4	2.14	1.58	1.03
8EA.885.263	155	35	80	95	40	170	230	95	20	12	2.8	2.19	1.73	1.10
8EA.885.264									30	14	4.2	3.10	2.47	1.64
8EA.885.265									40	15	5.5	4.10	3.00	2.10
8EA.885.266									50	16	6.9	5.02	3.69	2.50
8EA.885.267									60	20	8.3	5.51	4.28	2.84

表 14(1Cr18Ni9)

mm

代 号	B	B1	B2	R	R1	H	H1	H2	t	焊角 A	重量 (kg)	许用载荷		
												P 向	F 向	Y 向
												(t)		
8EA.885.268	76	16	40	50	20	90	130	50	16	10	0.6	0.52	0.45	0.27
8EA.885.269									20	12	0.7	0.78	0.57	0.34
8EA.885.270									30	14	1.0	1.06	0.87	0.50
8EA.885.271									40	15	1.4	1.49	1.10	0.71
8EA.885.272	155	35	80	95	40	170	230	95	20	12	2.8	1.38	1.09	0.64
8EA.885.273									30	14	4.2	1.96	1.56	1.03
8EA.885.274									40	15	5.5	2.85	2.08	1.39
8EA.885.275									50	16	6.9	3.42	2.56	1.73
8EA.885.276									60	20	8.3	4.11	3.19	2.12

4 材料

Q235 按 GB/T700—1988；Q345 按 GB/T1591—1994；1Cr18Ni9 按 GB/T4237—1992。

5 标记

系列 4 中 B=150、R=50、t=30, 材料为 1Cr18Ni9 的吊耳和 H1=230、B=155、R=95、t=40, 材料为 Q345 的吊钩分别标记为:

8EA.885.265	吊 钩
8EA.885.235	吊 耳
代 号	名 称